

# 2025 EXPEDITION® LE

A crossover sport-utility vehicle capable of off-trail exploration, on-trail cruises and enjoyable work days.



EXPEDITION LE 900 ACE TURBO R SHOWN

EXPEDITION LE 900 ACE TURBO SHOWN

## // PACKAGE HIGHLIGHTS

- Four Rotax® engines available: 600R E-TEC®, 900 ACE™ Turbo R, 900 ACE Turbo and 900 ACE engines
- Available with 20 in. or 24 in. track options
- Multi-LinQ plate with 125 lb/56.7 kg cargo capacity
- 4.5 in. digital display
- RAS™ X crossover front suspension with 39 in. ski stance
- SC¹-5U articulating rear suspension with locking mechanism (no tool required)
- Air radiator with fan
- Deep snow running boards with large openings
- Removable passenger seat with heated grips
- High passenger backrest
- Hitch receiver with 1,500 lb/680 kg towing capacity when equipped with an HD rear bumper (1,200 lb/544 kg std.)
- High-capacity battery
- Easy-shift transmission (H-L-N) with RER™ electronic reverse (2-stroke)/electro-mechanical reverse (4-stroke)
- Ultra-high windshield with side deflectors
- Pivoting mirrors
- Pilot™ 7.4 skis
- Heated driver's visor power outlet
- Low handlebar strap
- pDrive™ clutch

ROTAX ENGINE	600R E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Engine details	Liquid-cooled, two-stroke, eRAVE™	Liquid-cooled, four-stroke D.O.H.C., dry sump, turbocharged with intercooler	Liquid-cooled, four-stroke D.O.H.C., dry sump, turbocharged	Liquid-cooled, four-stroke D.O.H.C., dry sump
Horsepower*	125	180	130	95
Cylinders - Displacement	2 - 599.4 cc	3 - 899 cc	3 - 899 cc	3 - 899 cc
Bore - Stroke (mm)	72.3 - 73	73 - 69.7	73 - 69.7	73 - 69.7
Fuel system	E-TEC direct injection	EFI	EFI	EFI
Fuel type - Octane	Premium unleaded - 91	Premium unleaded - 91	Premium unleaded - 91	Regular unleaded - 87
Fuel tank (L/US gal)	42/11.1	42/11.1	42/11.1	42/11.1
Oil tank capacity (L/qt)	3.4/3.6	3.3/3.5	3.3/3.5	3.3/3.5
<b>POWERTRAIN</b>				
Drive clutch	pDrive with clickers/QRS	pDrive QRS Vent	pDrive QRS Vent	pDrive QRS
Driven clutch	(20 in.) QRS Vent (24 in.)			
Drive sprocket pitch (mm/in.)	73/2.86	73/2.86	73/2.86	73/2.86
<b>DRY WEIGHT</b>				
Dry weight 20 in. track (lb)	619	674	669	643
Dry weight 24 in. track (lb)	640	694	690	664

DIMENSIONS	
Vehicle overall length (mm/in.)	3,256/128.2
Vehicle overall width (mm/in.)	1,200 to 1,240/47.7 to 48.8
Vehicle overall height (mm/in.)	1,513/59.6
Ski stance (mm/in.)	1,000/39 (adjustable)
Available tracks (in.) (Length x width x profile)	Silent Cobra WT: 154 x 20 x 1.5 Silent Cobra SWT: 154 x 24 x 1.5 opt.

SUSPENSION	
Front suspension	RAS X
Front shock	KYB® 36
Front suspension travel (mm/in.)	220/8.7
Rear suspension	SC-5U
Center shock	KYB 36
Rear shock	KYB 36
Rear suspension travel (mm/in.)	239/9.4

COLOR	
Catalyst Grey and Black	
Black	

FEATURES	
Platform	REV® Gen4
Headlights	Halogen
Skis	Pilot 7.4
Seating	WideTrack 2-up
Handlebar	Standard with J-hooks/Grab handle
Riser block height (mm/in.)	145/5.7
Starter	Electric
Reverse	RER (600R E-TEC) Electro-mechanical (ACE engines)
Air radiator	Fan
Brake system	Brembo®
Heated throttle and lever/grips	Standard (driver and passenger)
Gauge type	4.5 in. digital
Windshield	Ultra-high with mirrors
Runner (in.) - Carbide (in.)	3/8 square - 4
Bumpers (front/rear)	Heavy-duty/Hitch receiver

## 2025 EXPEDITION LE

## // FEATURE HIGHLIGHTS



### 1 Rotax 900 ACE Turbo R engine

Now the most powerful 4-stroke engine ever offered in a Ski-Doo. Ferocious, instant acceleration and top speed through bigger fuel injectors, increased boost and optimized intake and exhaust systems. The new cable activated iTC throttle better matches a performance rider's profile while offering three driving modes.




### 2 Utility 2-up seat

The ideal combination of comfort and convenience. Driver and passenger seat offering comfort and maneuverability for the driver, and convenience and protection for the passenger. Shielded and heated passenger hand grips.



### 3 SC-5U articulating rear suspension

The articulated rail maximizes deep snow traction in reverse, and its toolless locking mechanism is ideal for towing.

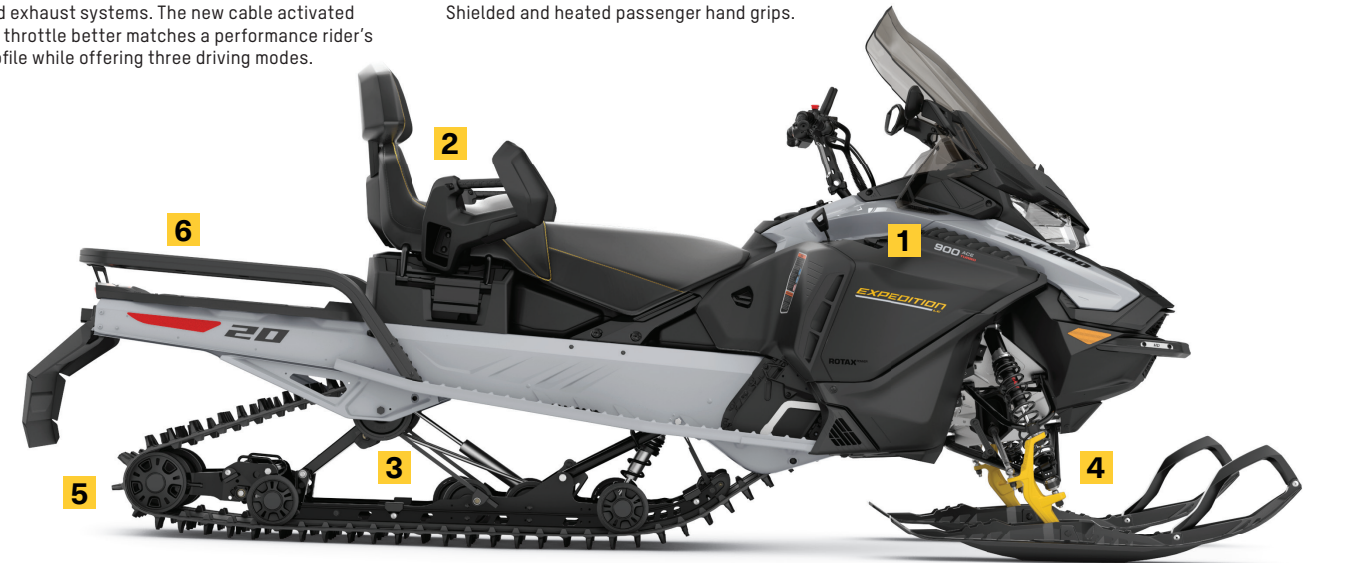

EXPEDITION LE 900 ACE TURBO SHOWN



### 4 RAS X crossover front suspension

An updated version of our RAS X trail front end for capability on- and off-trail. Light steering feel optimized for crossover usage with adjustable stance.



### 5 20 in. and 24 in. wide tracks available

A wide range of options built to offer superb flotation and meet any towing needs.



### 6 Multi-LinQ plate

Standard LinQ adaptable storage. Fits 16 and 20 in. wide LinQ accessories to maximize accessory options. Up to 125 lb (56.7 kg) of cargo capacity.



\*Observed HP measured on internal dyno test in optimal conditions. ©2024 Bombardier Recreational Products Inc., (BRP). All rights reserved. ®, TM and the BRP logo are trademarks of BRP or its affiliates. Products are distributed in the USA by BRP US Inc. †All other trademarks are the property of their respective owners. Because of our ongoing commitment to product quality and innovation, BRP reserves the right at anytime to discontinue or change specifications, price, design, features, models or equipment without incurring any obligation. Printed in Canada.



# 2025 EXPEDITION® SE

The utmost crossover sport-utility vehicle with an incredible list of work and luxury features.



EXPEDITION SE  
900 ACE TURBO SHOWN

EXPEDITION SE  
900 ACE TURBO SHOWN

## // PACKAGE HIGHLIGHTS

- Four Rotax® engines available: 850 E-TEC®, 900 ACE™ Turbo R, 900 ACE Turbo and 900 ACE
- Air Control Suspension (ACS) rear shock
- RAS™ X crossover front suspension with 39 in. ski stance
- 7.8 in. wide LCD display with BRP Connect available
- SC1-5U articulating rear suspension with locking mechanism (no tool required)
- 20 in. wide Multi-LinQ® plate with 125 lb/56.7 kg cargo capacity
- Air radiator with fan
- Deep snow running boards with large openings
- Removable passenger seat with heated grips
- Ultra-large LinQ utility cargo box with 135 L/35.7 US gal of storage
- Hitch receiver with 1,500 lb/680 kg towing capacity when equipped with an HD rear bumper (1,200 lb/544 kg std.)
- High-capacity battery
- Forward adjustable riser
- Easy-shift transmission (H-L-N) with RER™ electronic reverse (2-stroke)/electro-mechanical reverse (4-stroke)
- Ultra-high windshield with side deflectors
- Pivoting mirrors
- Pilot™ 7.4 skis
- Heated driver's visor power outlet
- pDrive™ clutch
- Backlit multifunction handlebar controls

ROTAX ENGINE	850 E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Engine details	Liquid-cooled, two-stroke, eRAVE™	Liquid-cooled, four-stroke D.O.H.C., dry sump, turbocharged with intercooler	Liquid-cooled, four-stroke D.O.H.C., dry sump, turbocharged	Liquid-cooled, four-stroke D.O.H.C., dry sump
Horsepower*	165	180	130	95
Cylinders – Displacement	2 – 849 cc	3 – 899 cc	3 – 899 cc	3 – 899 cc
Bore – Stroke (mm)	82 – 80.4	73 – 69.7	73 – 69.7	73 – 69.7
Fuel system	E-TEC direct injection with additional booster injectors	EFI	EFI	EFI
Fuel type – Octane	Premium unleaded – 91	Premium unleaded – 91	Premium unleaded – 91	Regular unleaded – 87
Fuel tank (L/US gal)	42/11.1	42/11.1	42/11.1	42/11.1
Oil tank capacity (L/qt)	3.4/3.6	3.3/3.5	3.3/3.5	3.3/3.5

POWERTRAIN	850 E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Drive clutch	pDrive with clickers	pDrive	pDrive	pDrive
Driven clutch	QRS Vent Plus	QRS Vent	QRS Vent	QRS
Drive sprocket pitch (mm/in.)	73/2.86	73/2.86	73/2.86	73/2.86

DRY WEIGHT	850 E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Dry weight (lb)	641	686	682	656

DIMENSIONS	850 E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Vehicle overall length (mm/in.)	3,256/128.2			
Vehicle overall width (mm/in.)	1,200 to 1,240/47.7 to 48.8			
Vehicle overall height (mm/in.)	1,513/59.6			
Ski stance (mm/in.)	1,000/39 (adjustable)			
Available tracks (in.) (Length x width x profile)	Silent Cobra WT: 154 x 20 x 1.5 Silent Ice Cobra WT: 154 x 20 x 1.5 opt. Silent Cobra WT: 154 x 20 x 1.8 opt.			

SUSPENSION	850 E-TEC	900 ACE TURBO R	900 ACE TURBO	900 ACE
Front suspension			RAS X	
Front shock			KYB 36	
Front suspension travel (mm/in.)			220/8.7	
Rear suspension			SC-5U	
Center shock			KYB 36	
Rear shock			ACS (Air Control Suspension)	
Rear suspension travel (mm/in.)			239/9.4	

COLOR
Dusty Navy and Black
Black

FEATURES	
Platform	REV® Gen4
Headlights	Halogen
Skis	Pilot 7.4
Seating	WideTrack 2-up
Handlebar	Standard with J-hooks/Grab handle
Riser block height (mm/in.)	Adjustable-120/4.7
Starter	Electric
Reverse	RER (850 E-TEC) Electro-mechanical (ACE engines)
Air radiator	Fan
Brake system	Brembo <sup>1</sup>
Heated throttle and lever/grips	Standard (driver and passenger)
Gauge type	7.2 in. digital 7.8 in. wide LCD color (opt. on ACE engines)
Windshield	Ultra-high with mirrors
Runner (in.) – Carbide (in.)	3/8 square – 4
Bumpers (front/rear)	Heavy-duty/Hitch receiver

## 2025 EXPEDITION SE

## // FEATURE HIGHLIGHTS



### 1 Rotax 900 ACE Turbo R engine

Now the most powerful 4-stroke engine ever offered in a Ski-Doo. Ferocious, instant acceleration and top speed through bigger fuel injectors, increased boost and optimized intake and exhaust systems. The new cable activated iTC throttle better matches a performance rider's profile while offering three driving modes.



### 2 SC-5U rear suspension with Air Control Shock (ACS)

The articulated rail maximizes deep snow traction in reverse, and its toolless locking mechanism is ideal for towing. Combined with ACS and its on-the-fly preload settings, you have the best of both utility functions and adjustable comfort.



### 3 Ultra-large LinQ utility cargo box

135 L/35.7 US gal of lockable, weather-resistant storage capacity. Incorporated hatchet and saw holder, plus attachment points for bungees and two 16 in. LinQ positions on top for expandable accessory use.



EXPEDITION SE  
900 ACE TURBO SHOWN




### 4 Multi-LinQ plate

Standard LinQ adaptable storage. Fits 16 and 20 in. wide LinQ accessories to maximize accessory options. Up to 125 lb (56.7 kg) of cargo capacity.



### 5 Large panoramic 7.8 in. wide LCD color display available

Wide-screen full-color display lets riders truly customize their ride from behind the bars. Choose your preferred sled info, and see app-integrated information in a split-screen format with GPS, Bluetooth<sup>1</sup> music, helmet-to-helmet communication and more.

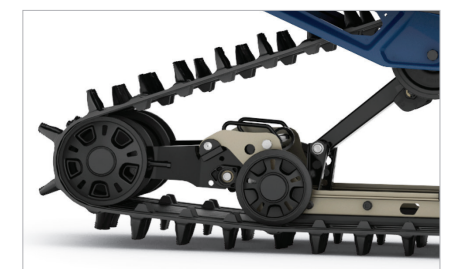

### 6 Three utility track choices

Choose from three different factory-installed Silent Cobra tracks, with or without carbide studs for extra traction in icy conditions.



\*Observed HP measured on internal dyno test in optimal conditions. ©2024 Bombardier Recreational Products Inc., [BRP]. All rights reserved. ®, TM and the BRP logo are trademarks of BRP or its affiliates. Products are distributed in the USA by BRP US Inc. †All other trademarks are the property of their respective owners. Because of our ongoing commitment to product quality and innovation, BRP reserves the right at anytime to discontinue or change specifications, price, design, features, models or equipment without incurring any obligation. Printed in Canada.



# 2025 EXPEDITION® SPORT

2025 EXPEDITION SPORT

Ultra-responsive chassis for on- or off-trail rides and an extensive array of sport-utility and 2-up features.



EXPEDITION SPORT  
900 ACE SHOWN

## // PACKAGE HIGHLIGHTS

- Three Rotax® engines available: 900 ACE™, 600 ACE and 600 EFI
- pDrive™ clutch
- 4.5 in. digital display
- RAS™ X crossover front suspension with 39 in. ski stance
- SC1-5U articulating rear suspension with locking mechanism (no tool required)
- Brembo<sup>1</sup> brake
- Heavy-duty rear bumper with tongue-type hitch
- Air radiator with fan and engine oil cooler (ACE engines)
- 2-up seat with removable LinQ® passenger backrest and handholds
- Deep snow running boards with large openings
- Standard with 2 sets of LinQ attachment points
- Adjustable ski stance
- Pilot™ DS 2 skis
- 520 W magneto with Rotax® ACE™ engines

ROTAX ENGINE	600 EFI	900 ACE	600 ACE
Engine details	Liquid-cooled, two-stroke	Liquid-cooled, four-stroke D.O.H.C., dry sump	Liquid-cooled, four-stroke D.O.H.C., dry sump
Horsepower*	85	95	62
Cylinders – Displacement	2 – 599.4 cc	3 – 899 cc	2 – 600.0 cc
Bore – Stroke (mm)	72.3 – 73	73 – 69.7	73 – 69.7
Fuel system	EFI	EFI	EFI
Fuel type – Octane	Regular unleaded – 87	Regular unleaded – 87	Regular unleaded – 87
Fuel tank [L/US gal]	36/9.5	36/9.5	36/9.5
Oil tank capacity [L/qt]	3.4/3.6	3.3/3.5	2.1/2.2

POWERTRAIN	600 EFI	900 ACE	600 ACE
Drive clutch	pDrive	pDrive	eDrive™ 2
Driven clutch	QRS	QRS	QRS
Drive sprocket pitch [mm/in.]		73/2.86	

DRY WEIGHT	600 EFI	900 ACE	600 ACE
Dry weight [lb]	507	552	530

DIMENSIONS	600 EFI	900 ACE	600 ACE
Vehicle overall length [mm/in.]		3,309/130.3	
Vehicle overall width [mm/in.]		1,140 to 1,180/44.9 to 46.5	
Vehicle overall height [mm/in.]		1,513/59.6	
Ski stance [mm/in.]		1,000/39 (adjustable)	
Available tracks [in.]		Charger:	
[Length x width x profile]		154 x 16 x 1.5	

COLOR
Neo Yellow and Black

SUSPENSION	
Front suspension	RAS X
Front shock	Motion Control
Front suspension travel [mm/in.]	210/8.3
Rear suspension	SC-5U
Center shock	Motion Control
Rear shock	KYB 36
Rear suspension travel [mm/in.]	239/9.4

FEATURES	
Platform	REV® Gen4
Headlights	Halogen
Skis	Pilot DS 2
Seating	Trail wide 2-up seat LinQ Passenger Backrest
Handlebar	Standard with J-hooks
Riser block height [mm/in.]	145/5.7
Starter	Electric
Reverse	RER™ (600 EFI) Mechanical (ACE engines)
Air radiator	Fan (ACE engines)
Brake system	Brembo
Heated throttle lever/grips	Standard (driver only)
Gauge type	4.5 in. digital
Windshield	Ultra-high
Runner [in.] – Carbide [in.]	3/8 square – 4
Bumpers (front/rear)	Std/Heavy-duty with tongue-type hitch

## // FEATURE HIGHLIGHTS



[900 ACE engine shown]

### 1 Three engine choices

This versatile model benefits from three reliable, easy-to-own and fuel-efficient engine choices with the right power for any rider.



### 2 Modular 2-up seat

Easily remove or install the passenger backrest and handholds with the LinQ system.



### 3 RAS X crossover front suspension

An updated version of our RAS X trail front end for capability on- and off-trail. Light steering feel optimized for crossover usage with adjustable stance.



EXPEDITION SPORT  
900 ACE SHOWN



### 4 Air radiator with fan (ACE engines only)

Extra cooling capacity when pulling a heavy load, in low-snow conditions or at low speed.



### 5 Deep snow running boards

Massive, strategically shaped openings keep the boards clear. A tall extruded edge adds stiffness and has aggressive boot grips.



### 6 SC-5U articulating rear suspension

The articulated rail maximizes deep snow traction in reverse, and its toolless locking mechanism is ideal for towing.



\*Observed HP measured on internal dyno test in optimal conditions. ©2024 Bombardier Recreational Products Inc., [BRP]. All rights reserved. ®, TM and the BRP logo are trademarks of BRP or its affiliates. Products are distributed in the USA by BRP US Inc. All other trademarks are the property of their respective owners. Because of our ongoing commitment to product quality and innovation, BRP reserves the right at anytime to discontinue or change specifications, price, design, features, models or equipment without incurring any obligation. Printed in Canada.



# 2025 EXPEDITION® XTREME™

The high-performance  
widetrack crossover sled  
with capability to go  
just about anywhere.



EXPEDITION XTREME  
900 ACE TURBO R SHOWN



EXPEDITION XTREME  
850 E-TEC SHOWN

## // PACKAGE HIGHLIGHTS

- Two Rotax® engines available: 850 E-TEC® and 900 ACE™ Turbo R
- KYB® Pro 36 rear shock
- KYB 36 Plus front shocks
- RAS™ X crossover front suspension with 39 in. ski stance
- 4.5 in. digital display
- SC<sup>1</sup>-5U articulating rear suspension with locking mechanism (no tool required)
- 20 in. wide Multi-LinQ® plate with 125 lb/56.7 kg cargo capacity
- Air radiator with fan
- Deep snow running boards with large openings
- pDrive™ clutch with clickers
- Low handlebar strap
- Flexible handguards
- Electric start
- Pilot™ DS 3 skis
- Adjustable ski stance

### ROTAX ENGINE

	850 E-TEC	900 ACE TURBO R
Engine details	Liquid-cooled, two-stroke, eRAVE™	Liquid-cooled, four-stroke D.O.H.C., dry sump, turbocharged with intercooler
Horsepower*	165	180
Cylinders - Displacement	2 - 849 cc	3 - 899 cc
Bore - Stroke (mm)	82 - 80.4	73 - 69.7
Fuel system	E-TEC direct injection with additional booster injectors	EFI
Fuel type - Octane	Premium unleaded - 91	Premium unleaded - 91
Fuel tank (L/US gal)	42/11.1	42/11.1
Oil tank capacity (L/qt)	3.4/3.6	3.3/3.5

### POWERTRAIN

Drive clutch	pDrive with clickers	pDrive
Driven clutch	QRS Vent Plus	QRS Vent
Drive sprocket pitch (mm/in.)	73/2.86	

### DRY WEIGHT

Dry weight (lb)	593	619
-----------------	-----	-----

### DIMENSIONS

Vehicle overall length (mm/in.)	3,293/129.6
Vehicle overall width (mm/in.)	1,140 to 1,180/44.9 to 46.5
Vehicle overall height (mm/in.)	1,280/50.4
Ski stance (mm/in.)	1,000/39 (adjustable)
Available tracks (in.) (Length x width x profile)	Cobra WT: 154 x 20 x 1.8

### COLOR

Flare Yellow and Black	
Black	

### SUSPENSION

Front suspension	RAS X
Front shock	KYB 36 Plus
Front suspension travel (mm/in.)	220/8.7
Rear suspension	SC-5U
Center shock	KYB 36 Plus
Rear shock	KYB Pro 36
Rear suspension travel (mm/in.)	239/9.4

### FEATURES

Platform	REV® Gen4
Headlights	Halogen
Skis	Pilot DS 3
Seating	WideTrack 1-up
Handlebar	Standard with J-hooks/Grab handle/ Flexible handguards
Riser block height (mm/in.)	145/5.7
Starter	Electric
Reverse	RER™ (850 E-TEC) Electro-mechanical (900 ACE Turbo R)
Air radiator	Fan
Brake system	Brembo <sup>1</sup>
Heated throttle lever/grips	Standard
Gauge type	4.5 in. digital
Windshield	Low
Runner (in.) - Carbide (in.)	3/8 square - 4
Bumpers (front/rear)	Heavy-duty/Std


## 2025 EXPEDITION XTREME

## // FEATURE HIGHLIGHTS



### 1 Rotax 900 ACE Turbo R engine

Now the most powerful engine ever offered in a Ski-Doo. Ferocious, instant acceleration and top speed through bigger fuel injectors, increased boost and optimized intake and exhaust systems. The new cable activated iTC™ throttle better matches a performance rider's profile while offering three driving modes.

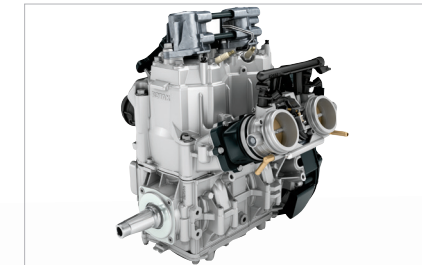

### 2 Rotax 850 E-TEC engine

Incredible power and unmatched dynamic response with exclusive E-TEC direct-injection technology. Exceptional, proven durability and excellent fuel and oil economy.



### 3 Like a Summit® with a 20 in. wide track

The REV Gen4 platform paired with the RAS X crossover front suspension allows effortless maneuvers in deep snow, while the 20 x 154 x 1.8 in. Cobra track provides incredible flotation and traction.



EXPEDITION XTREME  
850 E-TEC SHOWN



### 4 KYB Pro 36 piggyback rear shock with compression adjustment

Extreme-capability, extreme-durability shocks with compression adjustment for optimized control in the toughest conditions. Lightweight aluminum and rebuildable/revalvable.



### 5 SC-5U articulating rear suspension

The articulated rail maximizes deep snow traction in reverse, and its toolless locking mechanism is ideal for towing.



### 6 Multi-LinQ plate

Standard LinQ adaptable storage. Fits 16 and 20 in. wide LinQ accessories to maximize accessory options. Up to 125 lb (56.7 kg) of cargo capacity.

**ski-doo**



\*Observed HP measured on internal dyno test in optimal conditions. ©2024 Bombardier Recreational Products Inc., (BRP). All rights reserved. ®, TM and the BRP logo are trademarks of BRP or its affiliates. Products are distributed in the USA by BRP US Inc. †All other trademarks are the property of their respective owners. Because of our ongoing commitment to product quality and innovation, BRP reserves the right at anytime to discontinue or change specifications, price, design, features, models or equipment without incurring any obligation. Printed in Canada.